

Deluxe
with alarm wire
(0.6 gallon tank/
size 2 shown)



Basic
(0.3 gallon tank/
size 1 shown)

**POWER CABLE PLUGS INTO
PUMP FOR EASY MAINTENANCE**


hi flow condensate pumps

- basic & deluxe model

A REVOLUTION IN PUMPS

FEATURES	BASIC	DELUXE
Floatswitch on/off	✓	✓
Integral check valve	✓	✓
6ft plug-in cable	✓	✓
0.3 gallon tank - size 1	✓	✓
0.6 gallon tank - size 2	✓	✓
Maximum head	15 FOOT	20 FOOT
Self priming	✓	✓
Maximum pump capacity	75 GPH	70 GPH
ETL® Listed	✓	✓
Safety Float switch	X	✓
Transparent deck	✓	✓
Fire Retardant plastic	✓	✓
Integral wallmount bracket	✓	✓
Limited 12 month warranty	✓	✓

PERFORMANCE GRAPH

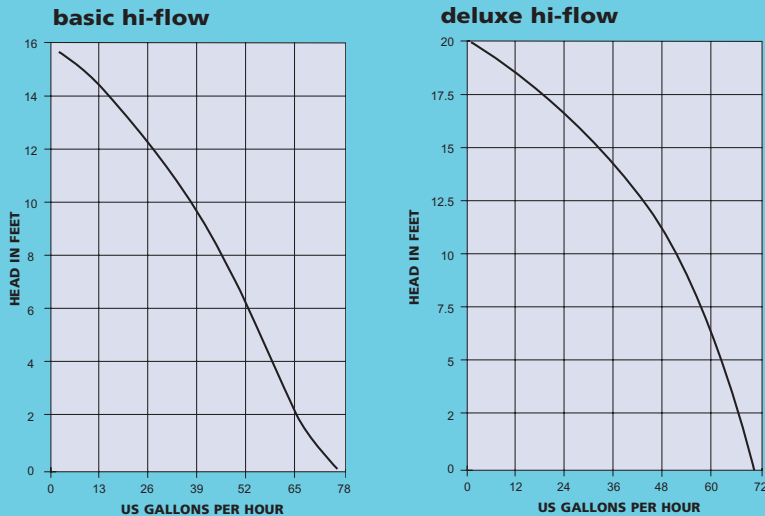

TECHNICAL DATA:

- Power supply 115 V AC, 1.2 A, 60Hz
230 V AC, 0.7 A, 60Hz

- Voltfree alarm contacts N/O, N/C rated
4A inductive & 8A resistive @ 115 & 230 V AC

- Capacity Basic: 75 gph
Deluxe: 70 gph

- Maximum Head Basic: 15ft
Deluxe: 20ft

- Thermally protected

- ETL® listed

Aspen basic and deluxe hi flow pumps are designed to collect condensate water from Air Conditioning equipment. Each pump comes in a choice of two tank sizes, 0.3 gallons (size 1) or 0.6 gallons (size 2).

The hi-flow basic pump is automatically operated by an internal float switch and has a maximum pumping capacity of 75 gph. at a maximum discharge head of 15ft.

The hi-flow deluxe pump, which, like the basic is automatically operated by an internal float switch, has a maximum pumping capacity of 70 gph. at a maximum discharge head of 20ft.

It includes a second internal float which operates a safety overflow switch that incorporates N/O and N/C contacts. In the event of a pump

failure this device will switch off the Air Conditioning System and can simultaneously activate an optional audio and/or visual alarm.

Other advantages of both the basic and deluxe models are:

- They incorporate an integral checkvalve to prevent backflow.
- They include a 78" long 3 wire power cable with plug-in connection at the pump which facilitates installation and enables them to be easily removed for inspection and maintenance.
- The deck of both models is made from clear plastic for quick and easy internal inspection.
- They incorporate an integral universal bracket to facilitate wall mounting where required.

CATALOG NUMBER	DESCRIPTION	VOLTS AC	HEIGHT	WIDTH	DEPTH	WEIGHT
ASP - HFB-1-110	BASIC SIZE 1 0.3 GALLON TANK	115	5.5"	9"	5.5"	3.7lbs
ASP - HFB-1-230	BASIC SIZE 1 0.3 GALLON TANK	230	5.5"	9"	5.5"	3.7lbs
ASP - HFB-2-110	BASIC SIZE 2 0.6 GALLON TANK	115	5.5"	9"	5.5"	3.7lbs
ASP - HFB-2-230	BASIC SIZE 2 0.6 GALLON TANK	230	5.5"	9"	5.5"	3.7lbs
ASP - HFD-1-110	DELUXE SIZE 1 0.3 GALLON TANK	115	6.5"	9"	5.5"	3.8lbs
ASP - HFD-1-230	DELUXE SIZE 1 0.3 GALLON TANK	230	6.5"	9"	5.5"	3.8lbs
ASP - HFD-2-110	DELUXE SIZE 2 0.6 GALLON TANK	115	6.5"	9"	5.5"	3.8lbs
ASP - HFD-2-230	DELUXE SIZE 2 0.6 GALLON TANK	230	6.5"	9"	5.5"	3.8lbs

ASPEN-01/04

Imported and Distributed by:

EZ-TRAP®

3 Kellogg Court, Unit 10, Edison, NJ 08817

Tel: 732-248-8066 Fax: 732-248-8068

email: info@eztrap.com

website: www.eztrap.com

Available from:

Product Warranty

The manufacturer disclaims all implied and express warranties, including the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, except as follows: The EZ-Trap condensate product purchased by you concurrently is unconditionally warranted to be free from defects in material and workmanship under normal use for a period of one year from date of purchase, providing it is installed and operated strictly in accordance with the manufacturer's installation instructions. If the product is found to be defect or otherwise fails in normal use, you may return it for replacement. All freight charges for the return of the product shall be borne by you. The manufacturer will pay outgoing freight charges for the replacement product. Defective product returned to the factory prepaid will be repaired or replaced free of charge. Replacement product will, to the extent such product is then available in the manufacturer's inventory, be of a similar type of color and kind. Manufacturer retains the right to substitute product if the replacement product does not conform in terms of color, type and specifications to the original product if no longer available. This warranty does not cover replacement labor or any cost, claim or incident to any defect nor does it cover any consequential damages. The sole liability of the manufacturer under this warranty is limited to the replacement of defective product. Product damaged by improper use, accident, neglect, alteration, abuse or improper installation is excluded from this warranty.